



Detroit Speed
Detroit Speed Control Arm and Spindle Kit
 1964-72 A-Body
 P/N: 030105DS

The Detroit Speed A-Body front suspension kit is a bolt-on package that addresses the shortcomings of the stock A-Body suspension. It includes tubular upper and lower control arms and alloy steel spindles. This package provides additional positive caster and an optimized camber curve at a lower ride height. The spindles are taller than the stock spindles and provide 2" of drop from stock height. The stock steer arms mount in the optimal location to minimize bump steer. The spindle allows the use of OEM disc brakes or aftermarket brakes designed to fit the stock spindle. The tubular lower control arms will accommodate a conventional coil spring or our coilover conversion kit.



Item	Part Description	Quantity
1	Tubular Upper Control Arm Kit	1
2	Tubular Lower Control Arm Kit	1
3	Drop Tall Spindle Kit	1
4	Upper Control Arm Hardware Kit	1
5	Lower Control Arm Hardware Kit	1
6	Spindle Hardware Kit	1
7	Instructions	1

Hardware Kit Checklist – Detroit Speed Front Speed Kit			
Part Number	Description	Quantity	Check
9303166	Upper Control Arm Hardware Kit	1	
960017FS	7/16"-14 Nylock Nut	4	
970015FS	7/16" AN Flat Washer	4	
9303196	Lower Control Arm Hardware Kit	1	
950036FS	5/16"-18 x 1" L Hex Head Bolt	4	
950045FS	5/16"-18 x 1" L Flat Head Bolt	2	
960033FS	5/16"-18 Nylock Nut	6	
970027FS	5/16" SAE Washer	8	
9303091	Jounce Bumper Pad Assembly	2	
9303215	Spindle Hardware Kit	1	
950034FS	1/2"-20 x 1-1/2" L Hex Head Bolt	2	
950035FS	1/2"-20 x 2-1/2" L Flat Head Bolt	4	
960044FS	1/2"-20 Prevailing Torque Nut	6	
960045FS	3/4"-20 Castle Nut	2	
970036FS	Keyed Washer	2	
99030171	1/8" Diameter x 1-1/4" L Steel Cotter Pin	2	

Fastener Torque Specifications	
Application	Torque (ft-lbs)
Upper Control Arm to Frame	50
Upper Ball Joint to Spindle	50
Lower Control Arm to Frame	80
Lower Ball Joint to Spindle	80
Upper Caliper Mounting Bracket	120
Steer Arm to Spindle	85
Lower Shock Mounting Bolts	25

NOTE: The ball joints are shipped without grease and must be lubed with a quality chassis grease before use.

1. Chock the rear wheels and loosen the front lug nuts. Raise the front of the vehicle and support the front of the vehicle with jack stands under the frame. Remove the front wheels.
2. Remove the brake caliper and rotor from the stock spindle. Remove the steer arm from the stock spindle. Do not discard the steer arm as it will be installed on the new spindle in a later step.
3. Remove the sway bar end links from the control arms if equipped. Remove the front shock absorbers.
4. Support the lower control arm with a jack and remove the nut from the lower ball joint.
CAUTION: The coil springs are under tension. The proper spring compressor must be used. Use a ball joint removal tool to separate the lower ball joint from the spindle. Loosen and remove the control arm mounting bolts and remove the lower control arm from the vehicle.
5. Remove the nut from the upper ball joint and separate the upper ball joint from the spindle using the appropriate ball joint removal tool. Loosen and remove the 7/16" nuts from the upper control arm cross shaft and remove the upper control arm from the vehicle. Keep the alignment shims so they can be reinstalled in their original positions.

6. Remove the rebound stops from the framerails, and install the new polyurethane rebound stops. Install the new rebound stop into the framerail by twisting it into the hole in the frame. Soapy water applied to the bottom of the rebound stop may aid in installation. **NOTE: For 1964-67 A-Body applications proceed to Step 8.**
7. For 1968-72 A-Body applications, Install the jounce bumper pad on the frame as shown in Figure 1 below. Position the pad on the frame so the jounce bumper will make direct, square contact with the pad. Mark the frame for the bolt location to mount the pad to the frame and drill through the frame for the 5/16"-18 countersunk bolt. Use the 5/16"-18 Nylock nut to attach the pad to the frame, no washer is required. Repeat this procedure on the other side of the vehicle.

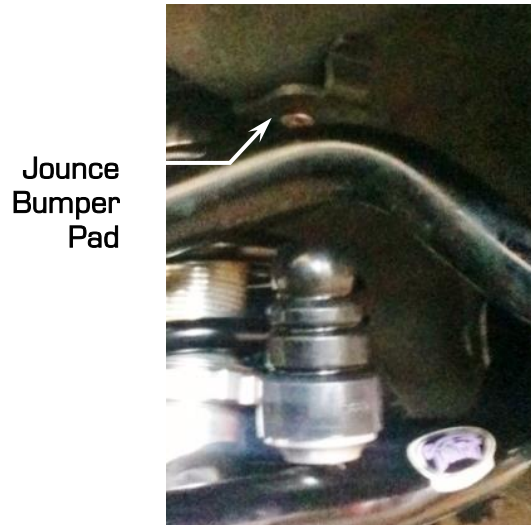


Figure 1 - Jounce Bumper Pad

8. Install the new upper control arms using the factory 7/16" bolts and the supplied 7/16" stainless steel AN flat washers and 7/16"-14 Nylock nuts. It may be necessary to remove the bolts from the frame to allow removal. Reinstall the alignment shims removed earlier in their original locations. Torque the nuts to 50 ft-lbs. Figure 2 shows the correct orientation for driver and passenger side.



Figure 2 - LH and RH orientation

9. Install the Detroit Speed spindle onto the upper ball joint stud using the supplied 1/2"-20 castle nut. Torque the nut to 50 ft-lbs and install the cotter pin. If necessary, tighten further to insert the cotter pin. Make sure to bend the cotter pin after sliding it through the ball joint to insure it does not slide out of the ball joint.
10. Attach the new lower control arm to the frame using the factory hardware. Torque the bolts between the control arms and the frame to 80 ft-lbs.

11. Install the coil spring. **NOTE: Use the appropriate spring compressor to install the coil springs.** If installing a coil over conversion, refer to the appropriate instructions regarding the coil over conversion at this time.
12. Insert the lower ball joint stud into the spindle and install the supplied 9/16"-18 castle nut. Torque the nut to 80 ft-lbs and install the cotter pin. If necessary, tighten further to insert the cotter pin. Again, make sure to bend the cotter pin after sliding it through the ball joint to insure it does not slide out of the ball joint. Remove the spring compressor.
13. Attach the sway bar end links to the lower control arms. Install the front shocks using the provided 5/16"-18 x 1" L Hex Head Bolts along with the 5/16"-18 Nylock nuts and washers. Torque to 25 ft-lbs.
14. Lube the upper and lower ball joints using a quality chassis grease.
15. Attach the original steer arms to the new spindles using the supplied countersunk cap screws and locknuts. **NOTE:** For 1964-66 applications, you will need to drill out the holes in your steer arms to accept the provided 1/2" hardware. When attaching the steer arm to the spindle, verify that the steer arm is level and in contact at both mounting points. Due to variation in the factory steer arms, clearancing for the steer arms may be necessary. Torque the 1/2" bolts to 85 ft-lbs.
16. Install the brakes. Stock brakes can be used, or an aftermarket brake kit can be used. If using stock brakes, the brake caliper brackets must be notched below the lower mounting hole to clear the new spindles. Refer to Figure 3. Use the original upper caliper bracket mounting bolts and the provided 1/2"-20 x 1-1/2" bolts and locknuts in the lower mounting holes. Torque the upper caliper bracket mounting bolts to 120 ft-lbs and the lower bolts to 85 ft-lbs. Use the provided new spindle tabbed washers, nuts and cotter pins when installing the rotors.

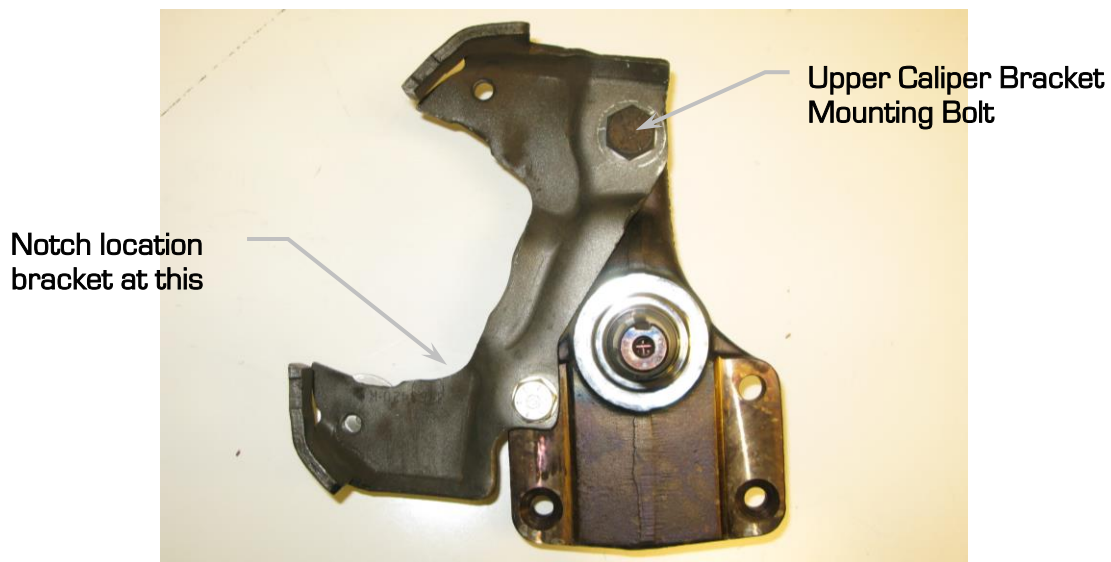


Figure 3 - Notching Stock Caliper Bracket

17. Install the wheels and lower the vehicle. A professional alignment must be performed at this time. Follow the specs in Figure 4.

Alignment Specifications A-Body Detroit Speed Suspension	
Camber	- 0.5° ± 0.2°
Caster	+ 4.0° ± 0.5°
Toe-in (Total)	1/16" ± 1/16"

Figure 4 - Alignment Specifications

Additional Alignment Notes:

Additional caster adjusters are supplied at no charge for caster adjustment if needed. Installing the caster adjuster with the attachment hole forward in the control arm will position the entire control arm rearward in car and create additional positive caster. The same adjusters can be rotated 180° for the opposite effect on caster. Finally, the second set of caster adjusters you have received (labeled “2”) can be used for additional caster or can be used for minimum caster. Figure 5 below shows the bushing removed and Figure 6 shows the bushing installed.



Figure 5 – Bushing Removed



Figure 6 – Bushing Installed

Camber should be adjusted by using shims provided by the alignment shop and placed between the frame attachment and cross shaft if needed.

18. The installation is now complete.

If you have any questions before or during the installation of this product, please contact Detroit Speed at tech@detroitsspeed.com or 704.662.3272

Legal Disclaimer: *Detroit Speed is not liable for personal, property, legal, or financial damages from the use or misuse of any product we sell. The purchaser is solely responsible for the safety and performance of these products. No warranty is expressed or implied.*